

NEW WIRING DEVICES
GALION
— STYLE —
Without
BORDERS



-> CATALOGUE PAGES INSIDE

THE GLOBAL SPECIALIST
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES



legrand

Perfect
— FOR —

TRENDY
INTERIOR
DESIGNS

A reflection of contemporary style and functionality designed to marry contemporary border-less design with quality and function, **Galion's range of wiring devices is crafted with excellence, using only the best quality components.**

SUMMARY

- 02-03 ELEGANT DETAILS THAT MAKE THE DIFFERENCE
- 04-05 MINIMALIST DESIGN WITH MAXIMUM FUNCTIONS
- 06-07 A GOOD PLACE TO STAY
- 08-09 JUST FEEL LIKE HOME
- 10-11 FINEST QUALITY COMPONENTS & MATERIAL
- 12-13 STRENGTH AND EASY INSTALLATION
- 14-16 CATALOGUE PAGES

01

GALION WIRING DEVICES



ELEGANT
DETAILS
That Make
— THE —
DIFFERENCE


A FULL PLATE,
BORDER-LESS
DESIGN,
GALION CAN SUIT
ANY INTERIOR
DESIGN STYLE



MATT BLACK



The slim and fine chamfering at the edges, the slightly curved plate: the details that make the difference for an even more refined product.

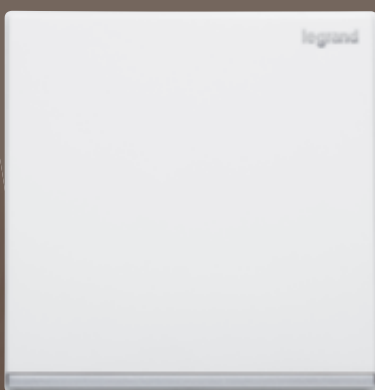

WHITE



ROSE GOLD

The delicate silver or electroplated bar accentuate the modern and exquisite elements of a minimalist design.

02
03

A minimalist dining table and chairs set. The table is light-colored with a dark, cross-shaped base. Two white chairs with yellow accents are positioned at the table. A pendant lamp hangs from the ceiling. The background features abstract green and white shapes.

minimalist
DESIGN
WITH
Maximum
FUNCTIONS




GALION OFFERS A WIDE SELECTION OF FUNCTIONS ABLE TO SATISFY REQUIREMENTS OF THE MOST CURRENT PROJECTS.

CONTROL MECHANISMS



16 A single pole switches: 1 and 2-way and from 1 to 4 gang



16 A push buttons with or without bell marking



RLC + LED rotary dimmers



20 A double pole switches: 1 gang - 1 way with LED or with «water heater marking»



Fan stepless controls

SOCKET OUTLETS



1 and 2 gang 13 A British standard socket outlets with or without LED power indicator, with or without USB charger




1 or 2 gang 16 A Multistandard socket outlets



13 A 1 gang fused connection units, with or without switch and LED power indicator


DATA SOCKET OUTLETS



Television sockets: female, «F» type and TV-FM-SAT



Double USB Type A charger



Data sockets: simple and double RJ 45 Cat. 6



04
05



A
GOOD
Place
TO STAY



DND/CUR marking switches



DND/CUR sign and bell push button

THE DEDICATED HOSPITALITY FUNCTIONS MAKE GALION A SOLUTION PERFECTLY ADAPTED TO THE NEEDS OF A MODERN GUEST ROOM.



Electromechanical or RFID Keycard switches



USB and HDMI socket



Shaver sockets



1 and 2 gang 13 A British standard socket outlets with USB chargers

The Multistandard socket outlets with USB charger combine standard power with the convenience of USB charging: your device plugs straight into the USB port, leaving the standard socket free. No need for bulky adaptors, and no need to compromise on running your other appliances as usual.

Equipped with two different USB charging ports, Type-A and Type-C™, 3 A - 5 V = 15W. With USB Type-C™ making its way more and more into phones, tablets, etc. you are sure to be prepared for tomorrow - today.

TYPE-A



TYPE-C



06
07

JUST
FEEL
LIKE —
Home





BE FREE TO FEEL AT HOME, BUT WITH THE ADDED CONVENIENCE OF HOTEL SERVICES. GALION PROVIDES ALL NEEDED FUNCTIONS FOR WELL-EQUIPPED AND COMFORTABLE SERVICED APARTMENTS.



The universal dimmer that dim and control dimmable LEDs and CFL, halogen or incandescent lamps. Enabling the customers to benefit of the entire potential of modern loads and helping them to create cosy interiors.



RCD + LED rotary dimmers



13 A 1 gang fused connection units, with switch and LED power indicator



45 A double pole switches 1 gang - 1-way, with LED and red rocker



45 A cooker units



THE ARTEOR ADAPTOR
It gives access to the Arteor functions for any installation requiring special functions like automatic switches, skirting light, sensitive switches, etc.



08
09

legrand

FINEST
Quality
**COMPONENTS
& MATERIAL**

legrand

13A



ONLY THE BEST-IN-CLASS MATERIALS

Made from fire retardant PC materials that fuses safety, with effortless maintenance to suit that busy lifestyle.



RELIABLE PROTECTION

Encased in fibreglass nylon shutter, enjoy peace of mind with a proven track record that exceeds more than 10 000 times in operations.



PERFECT CONDUCTIVITY

With a finely-tuned ratio of phosphor bronze and silver-nickel alloy, it is the pinnacle of perfection for electrical conductivity and elasticity.

10
11



Strength
AND
EASY
INSTALLATION


COMPLETE PRODUCT

1 CATALOGUE NUMBER = 1 READY TO INSTALL PRODUCT FOR QUICK SELECTION



STRENGTH IN ELEGANCE

A honeycomb design supporting frame brings about the best stability and strength for electrical structures.

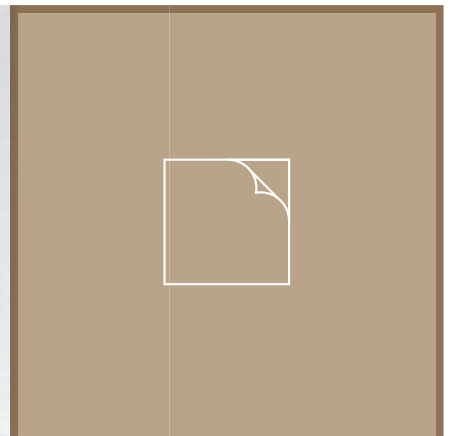

CLASSY SIMPLICITY

A soft protection film ensures the devices' cleanliness and neatness during installation.



EASY INSTALLATION

Experience assurance and security through installation with the new saddle-shaped terminal, which can fix up to three 4 mm² wires.

12
13



2 824 00



2 824 02-C



2 824 04-C1



2 824 06



2 824 19



2 824 19-C1

Conform to IEC 60669-1 standard. Polycarbonate front cover plates
 Supplied with 2 screws M 3.5 for BS boxes. Supplied complete with plate
 Dim.: 86 x 88 mm

Single pole switches - 16 AX - 250 V \sim

| Pack | Cat.Nos | |
|------|-------------|---|
| 8 | 2 824 00 | 1 gang - 1-way <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 8 | 2 824 00-C | |
| 8 | 2 824 00-C1 | |
| 8 | 2 824 01 | 1 gang - 2-way <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 8 | 2 824 01-C | |
| 8 | 2 824 01-C1 | |
| 8 | 2 824 13 | 1 gang - intermediate <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 8 | 2 824 13-C | |
| 8 | 2 824 13-C1 | |
| 8 | 2 824 02 | 2 gang - 1-way <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 8 | 2 824 02-C | |
| 8 | 2 824 02-C1 | |
| 8 | 2 824 03 | 2 gang - 2-way <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 8 | 2 824 03-C | |
| 8 | 2 824 03-C1 | |
| 8 | 2 824 04 | 3 gang - 1-way <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 8 | 2 824 04-C | |
| 8 | 2 824 04-C1 | |
| 8 | 2 824 05 | 3 gang - 2-way <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 8 | 2 824 05-C | |
| 8 | 2 824 05-C1 | |
| 8 | 2 824 06 | 4 gang - 1-way <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 8 | 2 824 06-C | |
| 8 | 2 824 06-C1 | |
| 8 | 2 824 07 | 4 gang - 2-way <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 8 | 2 824 07-C | |
| 8 | 2 824 07-C1 | |

Double pole switches 20 A - 250 V \sim

| | | |
|---|-------------|--|
| With earth link connector and amber LED power indicator | | |
| 8 | 2 824 08 | 1 gang - 1-way <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 8 | 2 824 08-C | |
| 8 | 2 824 08-C1 | |
| 8 | 2 824 14 | 1 gang - 1-way with "water heater" marking <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 8 | 2 824 14-C | |
| 8 | 2 824 14-C1 | |

Push-buttons 16 A - 250 V \sim

| | | |
|---|-------------|--|
| 8 | 2 824 11 | 1 gang - with "bell" marking <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 8 | 2 824 11-C | |
| 8 | 2 824 11-C1 | |

Push-buttons 16 A - 250 V \sim (continued)

| | | |
|--|-------------|--|
| 1 gang - without marking <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) | | |
| 8 | 2 824 10 | |
| 8 | 2 824 10-C | |
| 8 | 2 824 10-C1 | |

Rotary dimmers with neutral - 300 W RLC+LED

| | | |
|--|-------------|--|
| Conform to IEC 60669-2-1 | | |
| For all types of lamps: | | |
| - dimmable LEDs: 5 W to 75 W | | |
| - dimmable compact fluorescent lamps: 5 W to 75 W | | |
| - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA | | |
| - fluorescent tube - ballast: 5 VA to 300 VA | | |
| - halogen and incandescent 230 V \sim : 5 W to 300 W | | |
| 5 | 2 824 19 | <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 5 | 2 824 19-C | |
| 5 | 2 824 19-C1 | |

Active compensator

| | | |
|---|----------|--|
| 1 | 0 401 49 | <p>Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent) Consumption: 0.4 W</p> |
|---|----------|--|

Fan stepless controls

| | | |
|---|-------------|--|
| 5 | 2 824 90 | <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 5 | 2 824 90-C | |
| 5 | 2 824 90-C1 | |

Double pole switches 45 A - 250 V \sim

| | | |
|------------------------------|-------------|---|
| With red LED power indicator | | |
| 8 | 2 824 26 | 1 gang - 1-way <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 8 | 2 824 26-C | |
| 8 | 2 824 26-C1 | |
| 8 | 2 824 27 | 1 gang - 1-way with red rocker <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 8 | 2 824 27-C | |
| 8 | 2 824 27-C1 | |
| 8 | 2 824 28 | 1 gang - 1-way with "cooker" marking - with red rocker <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 8 | 2 824 28-C | |
| 8 | 2 824 28-C1 | |
| 8 | 2 824 29 | 2 gang (vertical) - 1-way with red rocker Dim.: 86 x 146 mm <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 8 | 2 824 29-C | |
| 8 | 2 824 29-C1 | |

Galion™

socket outlets, fused connection units and cable outlets



Polycarbonate front cover plates. Supplied with 2 screws M 3.5 for BS boxes. Supplied complete with plate. All sockets integrate child protection
 Dim.: 86 x 88 mm (1 gang) ; 146 x 88 mm (2 gang)

| Pack | Cat.Nos | British Standard socket outlets 13 A - 250 V~ | Pack | Cat.Nos | British Standard socket outlets 5 A - 250 V~ |
|-------------|---------------------------------------|--|-------------|---------------------------------------|---|
| 8 8 8 | 2 824 32 2 824 32-C 2 824 32-C1 | Conform to BS 1363-2 1 gang single pole - switched ○ White ● Matt Black ● Rose Gold | 8 8 8 | 2 824 38 2 824 38-C 2 824 38-C1 | Conform to BS 546 1 gang single pole - switched ○ White ● Matt Black ● Rose Gold |
| 8 8 8 | 2 824 80 2 824 80-C 2 824 80-C1 | 1 gang single pole - switched - with LED power indicator ○ White ● Matt Black ● Rose Gold | 8 8 8 | 2 824 34 2 824 34-C 2 824 34-C1 | Multistandard socket outlets 16 A - 250 V~ 1 gang - switched ○ White ● Matt Black ● Rose Gold |
| 5 5 5 | 2 824 33 2 824 33-C 2 824 33-C1 | 2 gang single pole - switched ○ White ● Matt Black ● Rose Gold | 5 5 5 | 2 824 35 2 824 35-C 2 824 35-C1 | 2 gang - switched ○ White ● Matt Black ● Rose Gold |
| 5 5 5 | 2 824 81 2 824 81-C 2 824 81-C1 | 2 gang single pole - switched - with LED power indicator ○ White ● Matt Black ● Rose Gold | 5 5 5 | 2 824 42 2 824 42-C 2 824 42-C1 | Multistandard socket outlets 16 A - 250 V~ - with USB chargers 1 gang - switched USB charger Type-A, 12 W Consumption in passive mode < 0.08 W ○ White ● Matt Black ● Rose Gold |
| 5 5 5 | 2 824 41 2 824 41-C 2 824 41-C1 | British Standard socket outlets 13 A - 250 V~ - with USB chargers Conform to BS 1363-2 1 gang single pole - switched USB charger Type-A, 12 W Consumption in passive mode < 0.08 W ○ White ● Matt Black ● Rose Gold | 5 5 5 | 2 824 44 2 824 44-C 2 824 44-C1 | 2 gang - switched USB chargers Type-A + Type-C, 15 W Consumption in passive mode < 0.08 W ○ White ● Matt Black ● Rose Gold |
| 5 5 5 | 2 824 43 2 824 43-C 2 824 43-C1 | 2 gang single pole - switched USB charger Type-A + Type-C, 15 W Consumption in passive mode < 0.08 W ○ White ● Matt Black ● Rose Gold | 8 8 8 | 2 824 50 2 824 50-C 2 824 50-C1 | Fused connection units - 13 A Conform to BS 1363 part 4 1 gang ○ White ● Matt Black ● Rose Gold |
| 5 5 5 | 2 824 25 2 824 25-C 2 824 25-C1 | Cooker units - 250 V~ Conform to IEC 60884-1 and IEC 60669-1 45 A double pole switch + 13 A British Standard switched socket and amber LED power indicators Dim.: 146 x 88 mm ○ White ● Matt Black ● Rose Gold | 8 8 8 | 2 824 51 2 824 51-C 2 824 51-C1 | 1 gang - with switch ○ White ● Matt Black ● Rose Gold |
| 8 8 8 | 2 824 37 2 824 37-C 2 824 37-C1 | British Standard socket outlets 15 A - 250 V~ Conform to BS 546 1 gang single pole - switched ○ White ● Matt Black ● Rose Gold | 8 8 8 | 2 824 53 2 824 53-C 2 824 53-C1 | 1 gang - with switch + LED power indicator ○ White ● Matt Black ● Rose Gold |
| 8 8 8 | 2 824 54 2 824 54-C 2 824 54-C1 | | 8 8 8 | 2 824 52 2 824 52-C 2 824 52-C1 | Cable outlets 1 gang - 45 A ○ White ● Matt Black ● Rose Gold |
| | | | | | 1 gang - 20 A ○ White ● Matt Black ● Rose Gold |

Galion™

TV and data sockets, USB chargers and accessories



2 824 49-C1



2 824 61



2 824 48-C

Polycarbonate front cover plates
Supplied with 2 screws M 3.5 for BS boxes
Supplied complete with plate
Dim.: 86 x 88 mm

| Pack | Cat.Nos | Television sockets |
|------|-------------|---|
| 8 | 2 824 57 | Single TV socket, Female <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 8 | 2 824 57-C | |
| 8 | 2 824 57-C1 | |
| 8 | 2 824 49 | Single TV socket, "F" type <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 8 | 2 824 49-C | |
| 8 | 2 824 49-C1 | |
| 8 | 2 824 59 | TV-R-SAT sockets Low attenuation: 1.5 dB <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 8 | 2 824 59-C | |
| 8 | 2 824 59-C1 | |
| 8 | 2 824 61 | Data sockets RJ 45 Cat.6 UTP <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 8 | 2 824 61-C | |
| 8 | 2 824 61-C1 | |
| 8 | 2 824 63 | Double RJ 45 Cat.6 UTP <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 8 | 2 824 63-C | |
| 8 | 2 824 63-C1 | |
| 5 | 2 824 47 | Double USB Type-A chargers 2.4 A - 5 V _{DC} - 12 W Consumption in passive mode < 0.08 W <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 5 | 2 824 47-C | |
| 5 | 2 824 47-C1 | |
| 8 | 2 824 48 | USB and HDMI data sockets <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 8 | 2 824 48-C | |
| 8 | 2 824 48-C1 | |
| 15 | 2 824 70 | Blanking plates <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 15 | 2 824 70-C | |
| 15 | 2 824 70-C1 | |
| 15 | 2 824 71 | Arteor adaptors For 2-module products <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 15 | 2 824 71-C | |
| 15 | 2 824 71-C1 | |

Galion™

hotel equipment



2 824 16



2 824 15-C1








2 824 39-C

Conform to IEC 60669-1 standard
Polycarbonate front cover plates
Supplied with 2 screws M 3.5 for BS boxes
Supplied complete with plate
Dim.: 86 x 88 mm

| Pack | Cat.Nos | Hotel guest room indicators |
|------|-------------|--|
| 1 | 2 824 17 | Enable the guest to inform hotel staff of the room status Two settings are possible: - do not disturb (DND) - please clean-up the room (CUR) Indicator lamp and bell button Installed in the corridor Double function: call indicator and bell button 1 gang, black touch plate |
| 8 | 2 824 16 | |
| 8 | 2 824 16-C | |
| 8 | 2 824 16-C1 | DND/CUR control units for guest room Installed in the guest room Allow the user to select the desired setting <ul style="list-style-type: none"> ○ White (Silver bar) ● Matt Black (Electroplate bar) ● Rose Gold (Electroplate bar) |
| 5 | 2 824 15 | |
| 5 | 2 824 15-C | |
| 5 | 2 824 15-C1 | Keycard switches - 230 V_~ - 16 A Supplied with one card <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 5 | 2 824 18 | |
| 5 | 2 824 18-C | |
| 5 | 2 824 18-C1 | RFID keycard switches - 230 V_~ - 16 A Compatible with ISO type contactless keycards <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |
| 1 | 2 824 39 | |
| 1 | 2 824 39-C | |
| 1 | 2 824 39-C1 | Shaver sockets Conform to IEC 61558-2-8 115/230 V - 20 VA - 50/60 Hz Power supply: 230 V _~ - 50/60 Hz Suitable for use with European, British, Australian, Chinese and US 2-pin plugs Dim: 86 x 146 mm 2 outputs <ul style="list-style-type: none"> ○ White ● Matt Black ● Rose Gold |



FOLLOW US ON

- @ legrand.com
-  youtube.com/user/legrand
-  facebook.com/Legrand
-  twitter.com/Legrand
-  pinterest.com/legrandgroup
-  instagram.com/legrandnews



Head Office
and International Department
87045 Limoges Cedex - France
Tel: +33(0)5 55 06 87 87
Fax: +33(0)5 55 06 74 55